

Sistemi per tende a pannelli

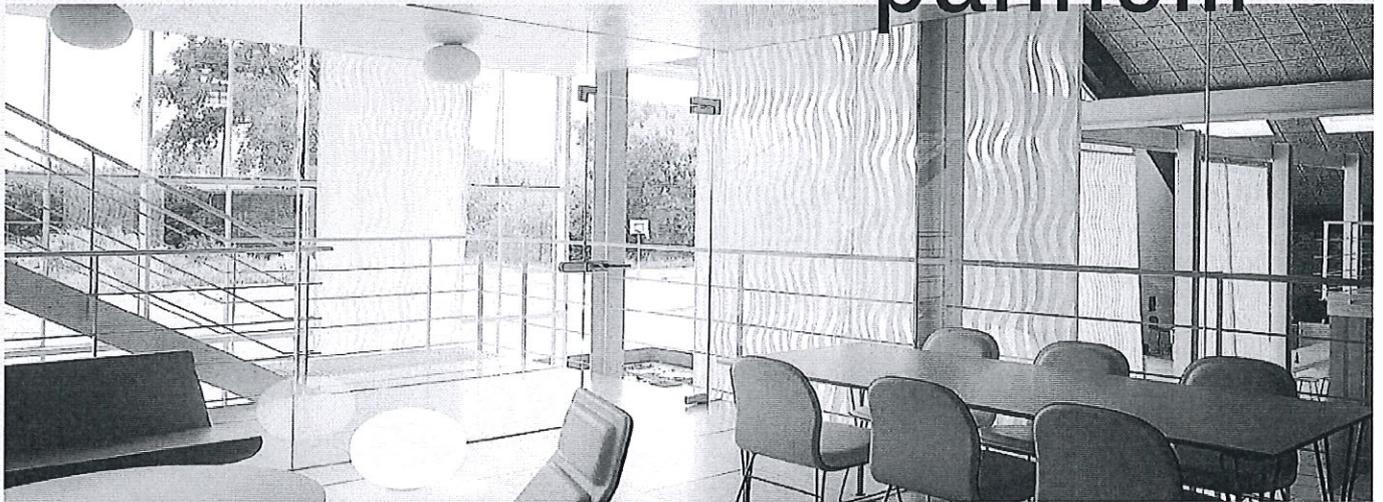



Tabella sistemi

| Comando | Dimensioni | | Applicazioni | Profilo | | | Caratteristiche / opzioni | Opzioni di fissaggio | Superfici di fissaggio | Sistemi |
|-----------|------------|----------|--------------|-------------------------------|-----------------------------|----------------------------|---------------------------|----------------------|------------------------|---------|
| | ← max. → | → max. ← | | Profilo | Dimensioni in mm | Canale di scorrimento (mm) | | | | |
| | ∞ | 4 m | ● ● ● ● | 10122 / 10123 / 10124 / 10125 | Diversi profili disponibili | 4.2 2-5 | ● ● ● ● | ● ● ● ● | ● ● ● ● | 2700 |
| | 6 m | 4 m | ● ● ● ● | | | | | | | |
| | ∞ | 3 m | ● ● ● ● | 10132 / 10133 / 10134 / 10135 | Diversi profili disponibili | 4.2 2-5 150 | ● | ● ● | ● ● ● | 2730 |
| | 6 m | 3 m | ● ● ● ● | | | | | | | |
| | ∞ | 2.8 m | ● ● ● ● | 6010 | | | ● ● | ● ● | ● ● ● | 2740 |
| Collegato | 6.05 m | 2.8 m | ● ● ● ● | | | | | | | |


*Con i sistemi SG 5100 e 5600

Profili per Silent Gliss 2700 & 2730

Silent Gliss 2700

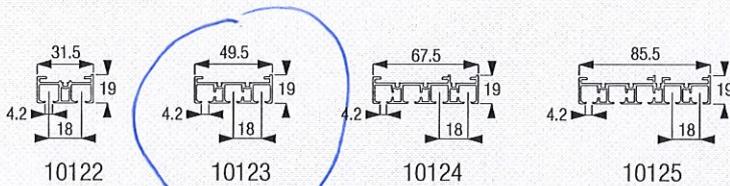


Silent Gliss 2730

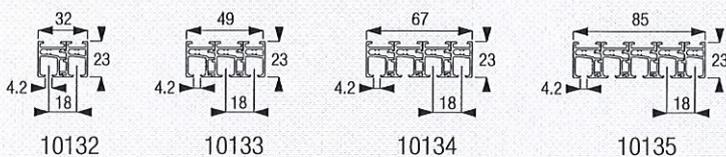


Metodi di funzionamento Silent Gliss 2700 & 2730

Silent Gliss 2700

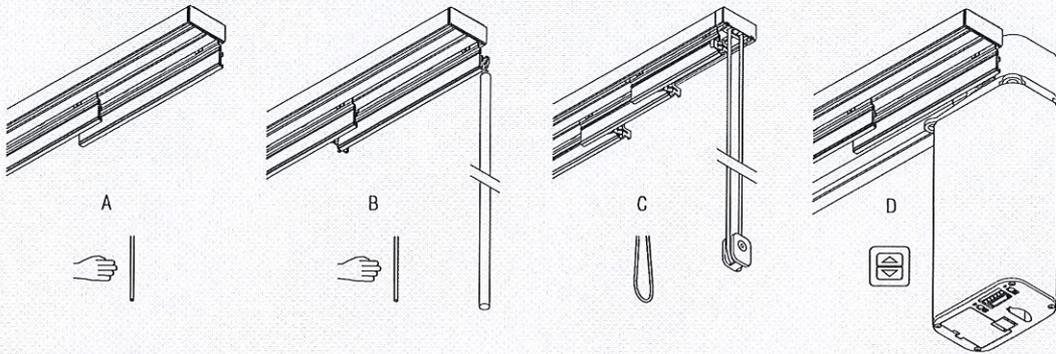


Silent Gliss 2730

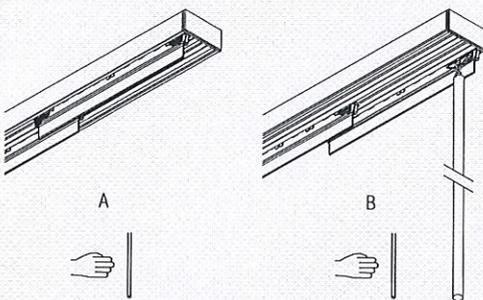


Possibile Profilo Combinazioni Silent Gliss 2700

Silent Gliss 2700

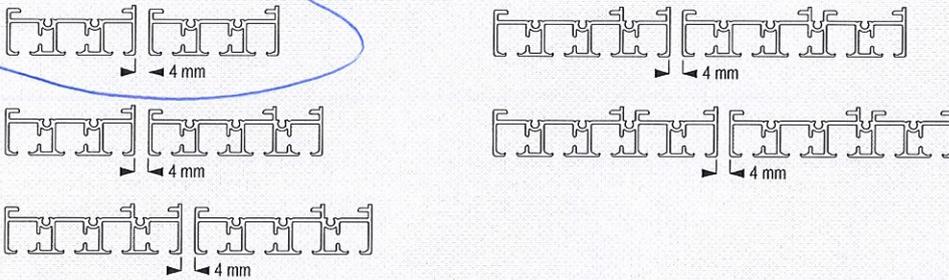

Impilabile Variations

Possibilità di apertura Silent Gliss 2700 e 2730

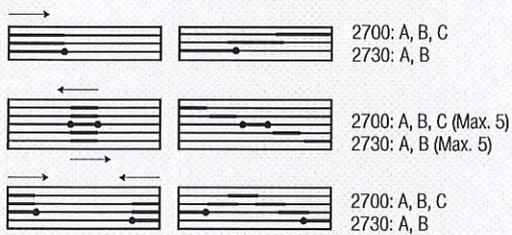

Alcune possibilità